

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 24 TOWNSHIP 14 RANGE 3

DATE: 8-19-01

PARTY CHIEF: Whiteside

CREW: _____

TYPE OF MARKER: Harrison


METHOD OF ESTABLISHMENT: County: 6-4-96

IN. S.P.C. E ZONE NAD '83



NAME: 14032407

N: 487119.7177(m)

E: 57782.2547(m)

 = bolt in signal pole base

Meridian St/SR 135 0 E/W

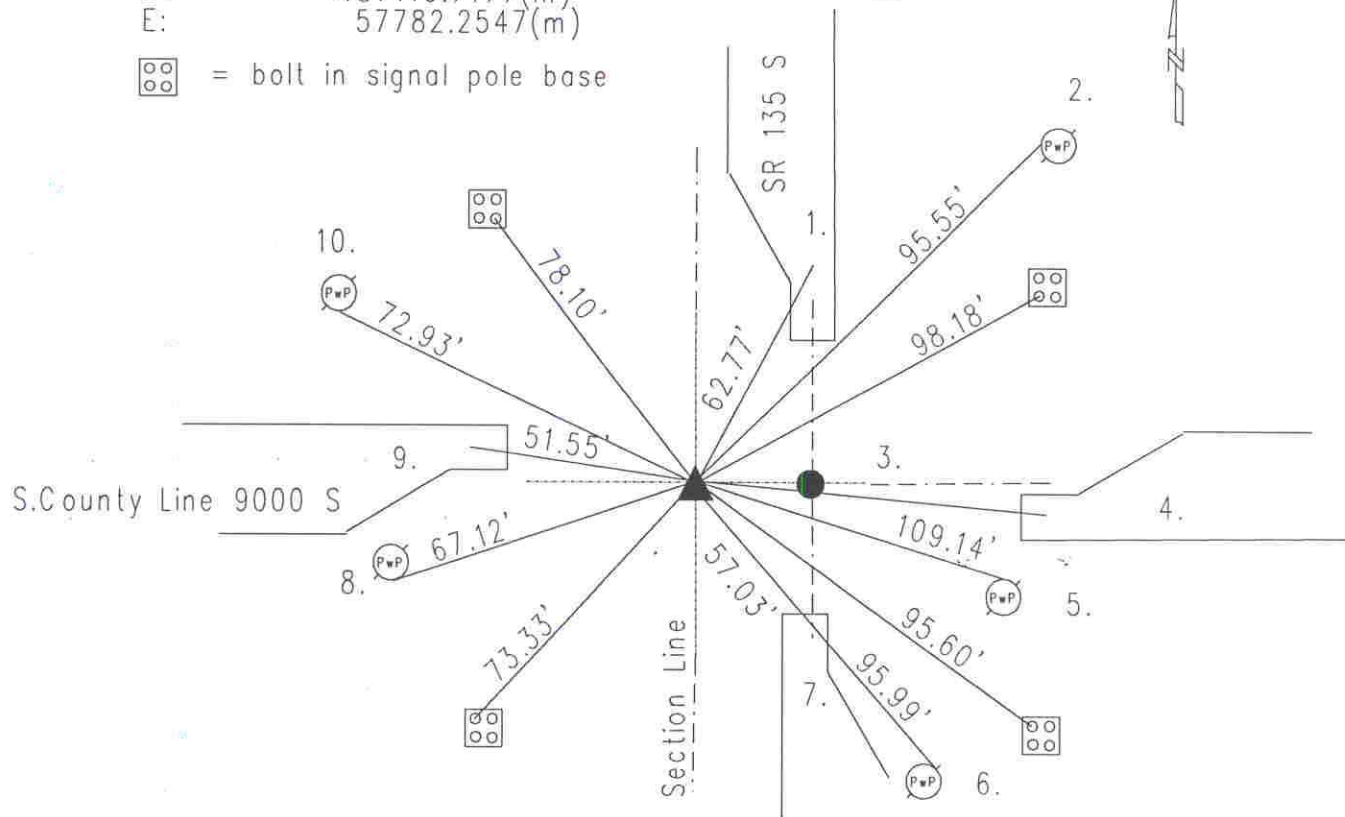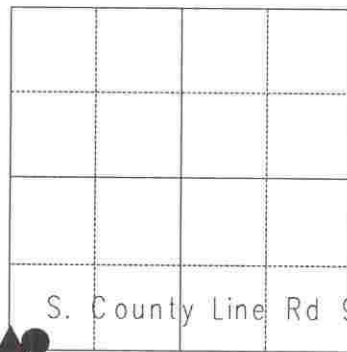

Original post set 1820 by Laughlin with witnesses: 12" beech N 72 W 34 links; 14" hickory S 61 E 19 links per Marion County Atlas pg. 5. Stone set 10-2-1876 by Hosbrook with no witness. 9-20-48 Miller called cut cross. 5-31-72 SeFranka called brass plug. 7-11-85 Miller called the same. 6-19-86 Greene called the same. 6-27-90 excavated and Harrison set. Re-tied 6-4-96 by Kiste. Re-tied 8-19-01 by Whiteside.

14032407

REF.	DISTANCE	DESCRIPTION
1.	62.77'	Cut 'x' S-end of concrete median
2.	95.55'	PK nail W PwP#5-816 12"up
3.	20.00'	Due E to Harrison C/L
4.	92.44'	Cut 'x' W-end of concrete median
5.	109.14'	PK nail N PwP#338-816 6"up
6.	95.99'	PK nail w/Johnson Cty washer E PwP#114-816 24"up
7.	57.03'	Cut 'x' N-end of concrete median
8.	67.12'	PK nail S PwP#52-815 8"up
9.	51.55'	Cut 'x' E-end of concrete median
10.	72.93'	PK nail S PwP no# 8"up